


65" Digital Signage Display

Sharp / NEC MultiSync M651-MPi4

Einfache Bereitstellung von Digital-Signage- und Echtzeit-Informationen.

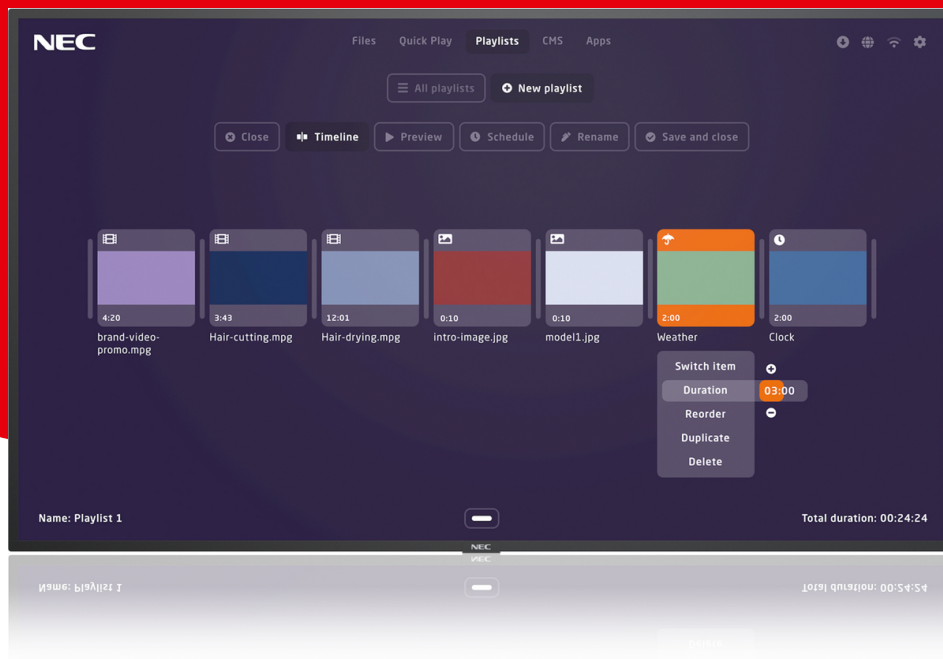

- Modern and slim design – robust yet elegant allowing for an unobtrusive integration into any application and environment.
- Intuitive Plug & Play solution – even when not familiar with using digital signage, users can facilitate stunning signage creation for immersive real-time visual experiences.
- Install third party software – expand the NEC MediaPlayer functionality via additional Apps or even switch to your preferred Content Management Systems (CMS) directly from of the NEC MediaPlayer.
- Everything under control – one single interface is needed to manage both the NEC MediaPlayer and the display directly, via a web-interface or the NEC Display remote control.
- Unhindered readability – no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation.

Technische Daten

DISPLAY

Bildschirmtechnologie	IPS with Direct LED backlights
Native Auflösung (Pixel)	3840 x 2160
Diagonale (Zoll / cm)	65 / 163.9
Seitenverhältnis	16:9
Helligkeit (cd/m2)	500
Kontrastverhältnis	≥ 8000:1
Reaktionszeit [ms]	8
Betrachtungswinkel (H/V) 0 CR> 10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)

STROMVERSORGUNG UND BETRIEBSUMGEBUNG

Betriebsspannung (ACV) / Frequenz (Hz)	100-240 V AC; 50 / 60 Hz
Leistungsaufnahme (W) (Betrieb MAX.)	120 shipping
Betriebstemperatur (oC)	0 to 40
Feuchtigkeit (%)	20 to 80

INSTALLATION

Querformat	•
Hochformat	•
Montage (VESA/Anzahl Punkte/Abstand mm)	4 / 400 x 400

KONNEKTIVITÄT (AUDIO/VIDEO) AUSGANG

Audio/Kopfhörer 3,5-mm-Buchse	1
-------------------------------	---

ZUBEHÖR

Fernbedienungssender	Yes
Netzkabel	Yes
Befestigungskonsole	Optional
Tischstativ	Optional

ECKWERTE

Begrenzte Herstellergarantie (in Jahren).	3
Lokale Verdunkelung	•
Integrierte Lautsprecher (W)	10W + 10W
Computereingang – Plug and Play	•
Power-Management	•
Gehäusefarbe	Black
Temperaturfühler	•
Helligkeitssensor	•

MAßE UND GEWICHTE

Bezel-Größe (L/R) mm	12.5
Bezel-Größe (U/L) mm	12 / 15.6
Produktabmessungen (B/H/T) mm	1,458.4 x 836.2 x 62.6
Versandkarton-Abmessungen (B/H/T) mm	1,736 x 1,033 x 280
Produktgewicht ohne Stativ (kg)	37.1
Versandgewicht (kg)	49.31

KONNEKTIVITÄT (AUDIO/VIDEO) EINGANG

HDMI	2
DisplayPort	1
Audio 3,5-mm-Buchse	1

KONNEKTIVITÄT (STEUERUNG/SERIELLE DATEN)

RS232C Eingang	1
LAN-Anschluss	1
USB	1

